


GASKET SHEETS

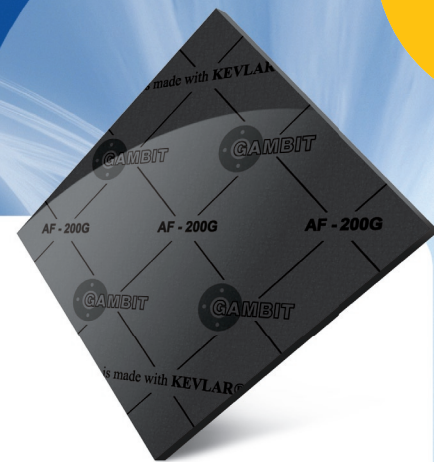

TECHNICAL SPECIFICATION

Gasket sheet Gambit AF-200G

Material

Gasket sheet **GAMBIT AF-200G** is based on Kevlar® aramide fibres, mineral fibres, and fillers bound with NBR rubber-based binder

Designation according to DIN 28091-2: **FA-AM1-O**

Kevlar® is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

General properties and applications

High parameter sheet, containing special combination of aramide fibres and graphite. The sheet features high elasticity. Recommended for applications with steam. Water, fuel, and oil resistant, among others.

Maximum working conditions

Peak temperature	°C	380
Temperature under continuous operation	°C	320
Temperature under continuous operation with steam	°C	250
Pressure	MPa	8


Dimensions

Standard thicknesses of sheets /thicknesses above 5.0 mm are produced by gluing/	mm	0,3; 0,5; 0,8 1,0; 1,5; 2,0; 2,5 3,0; 4,0; 5,0; 6,0	± 0,1 ± 10% ± 10%
Standard dimensions of sheets /custom dimensions available within the total range of 1500x3000 mm/	mm	1500x1500	± 10,0

Non-standard thicknesses, graphiting of sheet surfaces, and reinforcement with metallic mesh available upon request.
Metallic mesh reinforcement increases the maximum working pressure by 2 MPa (other physical and chemical properties are also changed).

All information in this catalogue is based on years of experience in manufacture and use of the discussed products.
Since sealing performance in the joint is subject to multiple factors such as mounting method, system parameters, and sealed medium, technical parameters specified herein are of informative nature only and cannot be used as grounds for any claims;
any special uses of products are subject to consulting with the manufacturer.


GASKET SHEETS

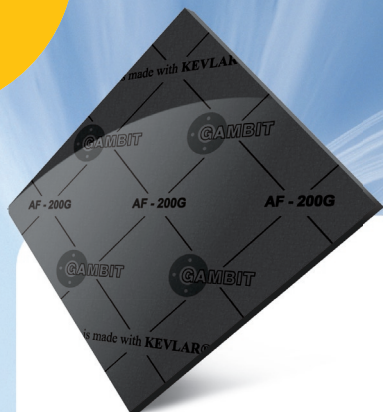

Physical and chemical properties

Density	± 5%	g/cm³	1,9	DIN 28090-2
Transverse tensile strength	min.	MPa	9	DIN 52910
Compressibility	typical value	%	10	ASTM F36
Elastic recovery	min.	%	50	ASTM F36
Residual stresses 50 MPa/16 h/300 °C/	min.	MPa	25	DIN 52913
Residual stresses 50 MPa/16 h/175 °C/	min.	MPa	30	DIN 52913
INCREASE IN THICKNESS				
Oil IRM 903 150 °C/5 h	max.	%	5	ASTM F146
Model fuel B 20 °C/5 h	max.	%	6	ASTM F146
Colour	graphite			

(Values as detailed in table refer to 2.0 mm thick gasket sheets)

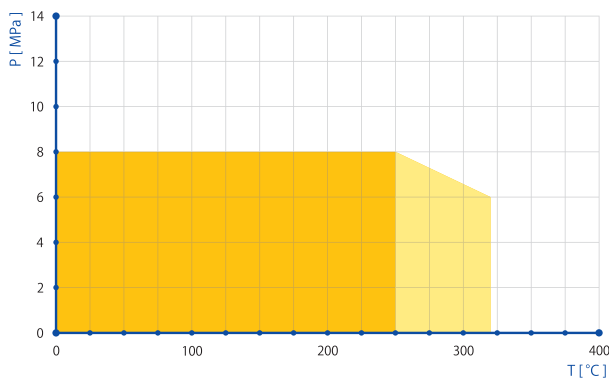

It is not recommended that maximum temperature and pressure are applied simultaneously. Pressure to temperature correlation for sheet thickness 2.0 mm is shown in the diagram.

- There is no requirement for trials.
- Trials should be run if the application involves steam.

All information in this catalogue is based on years of experience in manufacture and use of the discussed products. Since sealing performance in the joint is subject to multiple factors such as mounting method, system parameters, and sealed medium, technical parameters specified herein are of informative nature only and cannot be used as grounds for any claims; any special uses of products are subject to consulting with the manufacturer.